

KEVIS Assembled Surround System

CCTV Speed dome series

KEVIS **Module** Type Surround System

KSRD-2000



- PoE support
- Speed Dome can be replaced 2M 36/4K 40



AI PTZ Mini Dome Camera

KSD-204NIR

2M (4x zoom) PTZ Minidome



- AI recognition type: human, dog, cat face recognition
- AI recognition distance: up to 30M
- Area invasion detection function: user area designation
- Built in IO alarm input
- **350° horizontal rotation / 5°~90° vertical rotation**



Super lowlight IR Speed Dome Camera

KSD-2000 / 3000 / 4000

2M, (36x Optical zoom) High Power IR LED 10pcs

- Ultra low light 36x (6.0 ~ 216.0mm) optical zoom
- Image shake correction, fog correction
- 200m night visibility
- Real-time True WDR
- **Support international standard protocol ONVIF**

※ Design and Specification can be different between latest production, Please contact out sales for update.


· IP66 (Ingress Protection, international dust/waterproof standard) is applied when the product is installed and assembled correctly according to shipping conditions.

17, Gosan-ro 148beon-gil, Gunpo-si, Gyeonggi-do (Dangjeong-dong, Gunpo IT Valley Building B 1307) TEL. +82-31-427-9801 FAX. +82-31-427-9806 ● E-Mail : jy.an@kevis.co.kr



KEVIS **Module** Type Surround System

KSRD-2000

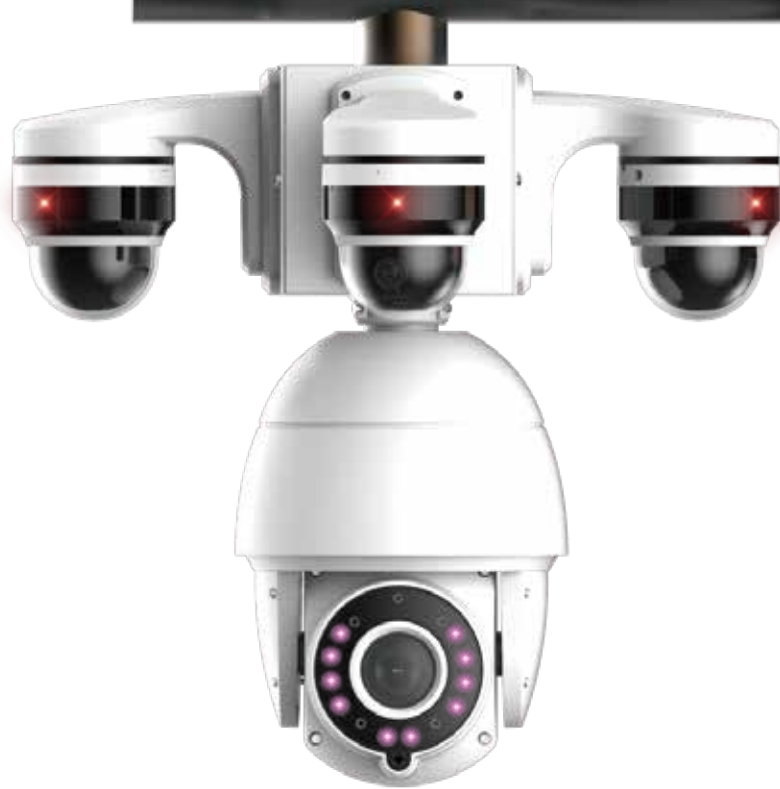

- PoE 지원
- Speed Dome 교체 가능 2M 36/4K 40



AI PTZ Mini Dome Camera

KSD-204NIR

2M (4x zoom) PTZ Minidome



- AI recognition type: human, dog, cat face recognition
- AI recognition distance: up to 30M
- Area invasion detection function: user area designation
- Built in IO alarm input
- **350° horizontal rotation / 5°~90° vertical rotation**



Super lowlight IR Speed Dome Camera

KSD-2000 / 3000 / 4000

2M, (36x Optical zoom) High Power IR LED 10pcs

- Ultra low light 36x (6.0 ~ 216.0mm) optical zoom
- Image shake correction, fog correction
- 200m night visibility
- Real-time True WDR
- **Support international standard protocol ONVIF**

