

4MP AF NETWORK BULLET CAMERA

# KSB-403NP




## Functions

- 4MP, 1/3" CMOS sensor
- Built-in laser direction indicator (optional)
- Supports WDR, 3D DNR, BLC, HLC
- 3 Streaming support
- Supports Mask, Defog, Mirror, Corridor Model
- Supports Motion Detection, Area intrusion, and Line crossing
- BMP/JPEG Snapshot support
- 4 areas mask support
- OSD area setting support
- ONVIF support



## Exterior view size

UNIT(mm)

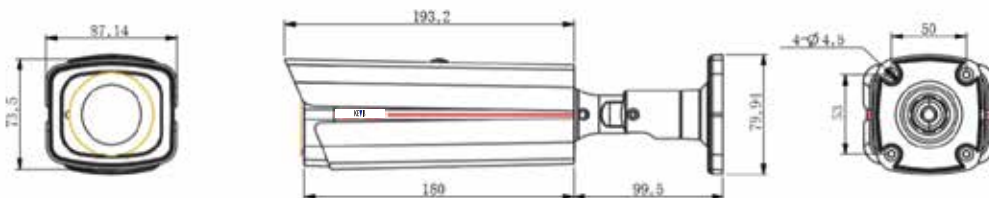

<b>Sensor</b>	1/2.8" CMOS/
<b>Lens</b>	2.8-12mm Motorized Lens
<b>MOD</b>	10mm-1000mm(Wide-Tele)
<b>Aperture</b>	F1.5-F2.7
<b>Illumination</b>	0.01LUX @COLOR, 0LUX with IR
<b>IR Distance</b>	60
<b>D/N Shift</b>	ICR, Auto, Timing
<b>DNR</b>	3D
<b>Pixel</b>	2560*1440
<b>Bite Rate</b>	50Hz: PAL @ 25fps, 60Hz :NTCS @30fps
<b>Image Adjustment</b>	Saturation, Brightness, Contrast, Sharpness, Hue Adjustment
<b>Image Setting</b>	Privacy Mask, Anti-Flicker, Defog, Corridor Mode, Mirror, Rotation, BLC, HLC
<b>Character Overlay</b>	Support channel name, date and time, multi-line character display, overlaid character size adjustment
<b>ROI</b>	4 regions
<b>Intelligent Alarm Protocol</b>	Motion Detection, Video tampering, Off-line, IP conflict, HDD Full TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP, PPPoE,NTP,UPnP,SMTP,SNMP, IPV6(Optional)
<b>Compatibility</b>	ONVIF
<b>General</b>	Three streams Heartbeat, Password
<b>Standard</b>	H.265 Main Profile H.264 Baseline/Main Profile/High Profile
<b>Output Rate</b>	64Kbps~16Mbps
<b>Storage</b>	Support
<b>Alarm Output</b>	Support
<b>Alarm Input</b>	Support
<b>Communication</b>	RJ45*1, 10M/100M self-adaptive
<b>Audio Input</b>	1ch
<b>Audio Output</b>	Support
<b>Video Output</b>	Support
<b>Working Temp.</b>	-20°C - +60°C, Humidity ≤ 95% (non-condensing)
<b>Power Supply</b>	DC12V/AC24V/POE
<b>Power Cons.</b>	<7.5W
<b>Dimension</b>	277.5*121.5*99.5mm
<b>Weight</b>	1.65Kg
<b>Ingress Protection option</b>	IP67 Laser Direction Pointer

※ Design and Specification can be different between latest production, Please contact out sales for update.

· IP66 (Ingress Protection, international dust/waterproof standard) is applied when the product is installed and assembled correctly according to shipping conditions.

17, Gosan-ro 148beon-gil, Gunpo-si, Gyeonggi-do (Dangjeong-dong, Gunpo IT Valley Building B 1307) TEL. +82-31-427-9801 FAX. +82-31-427-9806 ● E-Mail : jy.an@kevis.co.kr



4MP AF NETWORK BULLET CAMERA

# KSB-403NP




## Functions

- 4MP, 1/3" CMOS sensor
- Built-in laser direction indicator (optional)
- Supports WDR, 3D DNR, BLC, HLC
- 3 Streaming support
- Supports Mask, Defog, Mirror, Corridor Model
- Supports Motion Detection, Area intrusion, and Line crossing
- BMP/JPEG Snapshot support
- 4 areas mask support
- OSD area setting support
- ONVIF support



## Exterior view size

UNIT(mm)

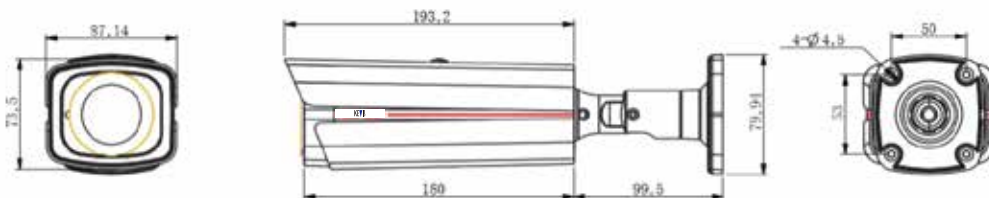

<b>Sensor</b>	1/2.8" CMOS/
<b>Lens</b>	2.8-12mm Motorized Lens
<b>MOD</b>	10mm-1000mm(Wide-Tele)
<b>Aperture</b>	F1.5-F2.7
<b>Illumination</b>	0.01LUX @COLOR, 0LUX with IR
<b>IR Distance</b>	60
<b>D/N Shift</b>	ICR, Auto, Timing
<b>DNR</b>	3D
<b>Pixel</b>	2560*1440
<b>Bite Rate</b>	50Hz: PAL @ 25fps, 60Hz :NTCS @30fps
<b>Image Adjustment</b>	Saturation, Brightness, Contrast, Sharpness, Hue Adjustment
<b>Image Setting</b>	Privacy Mask, Anti-Flicker, Defog, Corridor Mode, Mirror, Rotation, BLC, HLC
<b>Character Overlay</b>	Support channel name, date and time, multi-line character display, overlaid character size adjustment
<b>ROI</b>	4 regions
<b>Intelligent Alarm Protocol</b>	Motion Detection, Video tampering, Off-line, IP conflict, HDD Full TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP, PPPoE,NTP,UPnP,SMTP,SNMP, IPV6(Optional)
<b>Compatibility</b>	ONVIF
<b>General</b>	Three streams Heartbeat, Password
<b>Standard</b>	H.265 Main Profile H.264 Baseline/Main Profile/High Profile
<b>Output Rate</b>	64Kbps~16Mbps
<b>Storage</b>	Support
<b>Alarm Output</b>	Support
<b>Alarm Input</b>	Support
<b>Communication</b>	RJ45*1, 10M/100M self-adaptive
<b>Audio Input</b>	1ch
<b>Audio Output</b>	Support
<b>Video Output</b>	Support
<b>Working Temp.</b>	-20°C - +60°C, Humidity ≤ 95% (non-condensing)
<b>Power Supply</b>	DC12V/AC24V/POE
<b>Power Cons.</b>	<7.5W
<b>Dimension</b>	277.5*121.5*99.5mm
<b>Weight</b>	1.65Kg
<b>Ingress Protection option</b>	IP67 Laser Direction Pointer

