

EH-5160SHBD-W



※ Specification

EH-5160SHBD	
Usage & Open Type	Indoor / Outdoor & Side Hinge Type
Options	Sunshield (S), Heater (H), Blower (B), Defroster (D), Wiper (W)
Power	EH-5160SH [AC24V] 5160SHB [115V] 5160SHBD, 5160SHBD-W [230V]
Power consumption	
EH-5160SHB	24VAC:22W, 115VAC:35W, 230VAC:45W
EH-5160SHBD	24VAC:30W, 115VAC:42W, 230VAC:55W
EH-5160SHBD-W	24VAC:35W, 115VAC:52W, 230VAC:65W
Weather Resistant	
-5°C ~ +50°C (100%)	EH-5160 / 5160S
-40°C ~ +50°C (100%)	EH-5160SHB
-50°C ~ +50°C (100%)	EH-5160SHBD / 5160SHBD-W
Thermostat Heater	4°C±3°C (ON) / 15°C±3°C (OFF)
Thermostat Blower	45°C±5°C (ON) / 25°C±5°C (OFF)
IP LEVEL & Certification	IP 66 & CE
Weight	3.6kg

※ These specifications are standard and subject to change when designed


Features

- Aluminum die-casting processing
- Side hinge open type for convenient camera installation
- Waterproof IP66 grade


MODEL OPTIONAL

- 1.EH-5160S (with sunshield)
- 2.EH-5160SH (with sunshield, heater)
- 3.EH-5160SHB (with sunshield, heater, blower)
- 4.EH-5160SHB-W (with sunshield, heater, blower, wiper installed separately)

SIDE OPEN VIEW

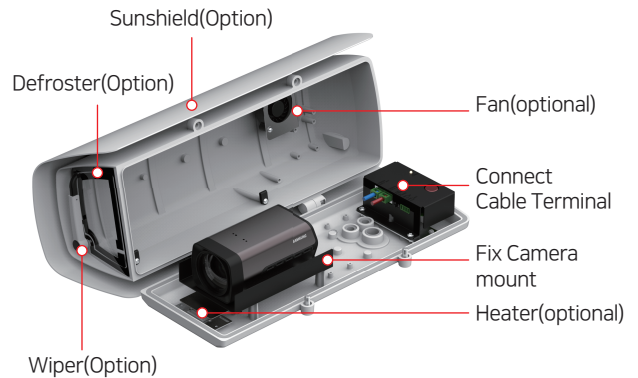



Dimensions

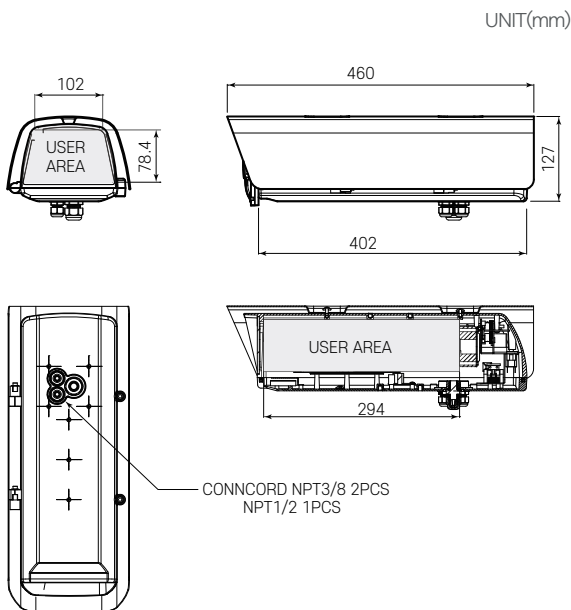

Accessories

| KBR-070CC | Wall Mount

| KBR-1000 | Wall Mount

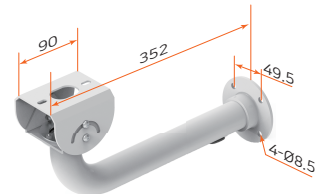

Specifications

Material	Aluminum
Weight	1.2kg
Max Loading	15kg
Color	Cool gray 2C
Pan&Tilt	360° / 90°
Install Dim	255x179x80

※ Compatible with PTB-100

Specifications

Material	Aluminum
Weight	1kg
Max Loading	15kg
Payload	Cool gray 1C
Dimension	360° / 90°
Install Dim	352 x 184.5 x 89

※ Compatible with KBR-2000 ~ KBR-5000