

GH-5380ST



※ Specification

GH-5380ST

lens	1st, 2nd Condensing IR Lens
Radiation angle	25°
Night surveillance distance	100M
Emitting band	850nm
LED	Hybrid Chip : Φ12.0 (High Density LED)
Operating temperature	-20°C ~ 55°C
Operating humidity	Below 90% Rh
Product use	Indoor / Outdoor
Power used	AC 220V
Power Consumption	29W / 69W (HEATER ON)
Product weight	4.2Kg
feature of product	Heater / Brower / Open type
External dimensions	255(W) x 145(H) x 540(L)mm

※ These specifications are standard and subject to change when designed


Features

- Hybrid housing
- Side open type
- Day & Night IR (optional)
- Multi-camera mountable (optional)
- Automatic control of internal temperature by fan / heater control by temperature sensor

SIDE OPEN VIEW



Dimensions

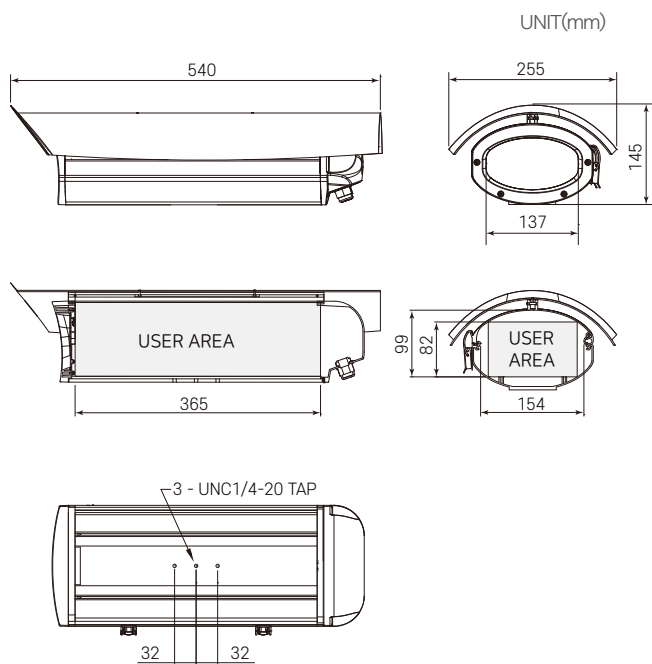


Accessories

| KBR-070CC | Wall Mount



| KBR-308G | Wall Mount

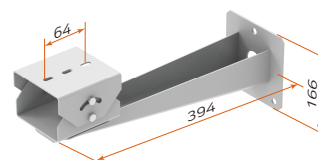

Specifications

Material	Aluminum
Weight	1.5kg
Max Loading	15kg
Color	IVORY
Pan&Tilt	360° / 90°
Install Dim	394 x 166 x 98.5

※ Compatible with PTB-100

Specifications

Material	Steel Metal
Weight	1.5kg
Max Loading	15kg
Payload	IVORY
Dimension	360° / 90°
Install Dim	394 x 166 x 98.5

※ Compatible with KBR-2000 ~ KBR-5000