

AH-5140SHB



※ Specification

AH-5140SHB


Usage & Open Type	Outdoor & Side Hinge Type
Options	Sunshield (S), Heater (H), Blower (B), IR LED Lamp(IR)
Body & Color	Aluminum 6063 UV Protect Powder Coating & Cool Gray 1C
Power	AC 24V(20W) / AC115V(35W) / AC 230V(45W)
Temperature of use	AH-5140S : -5°C~+45°C AH-5140SHBD : -20°C~+50°C (Heater, Blower, Defroster)
Safety certification	CE
IP Level	IP 55
Dimension (Out side) mm	160(w) x 113(h) x 460(d)
Dimension (In side) mm	100(w) x 80(h) x 280(d)
Weight	1.5kg
Accessories	Spring Washa M6, Flat Washer M6, Screw 1/4"-20X3/8" 2ea

※ These specifications are standard and subject to change when designed

Features


- Aluminum outdoor housing
- Day & Night (IR LED option)
- Smart heater / fan (optional)
- Complete waterproof (IP 55)
- outdoor housing (Slide Open type)
- Option: Sun shield (S), Heater (H), Blower (B)

SIDE OPEN VIEW

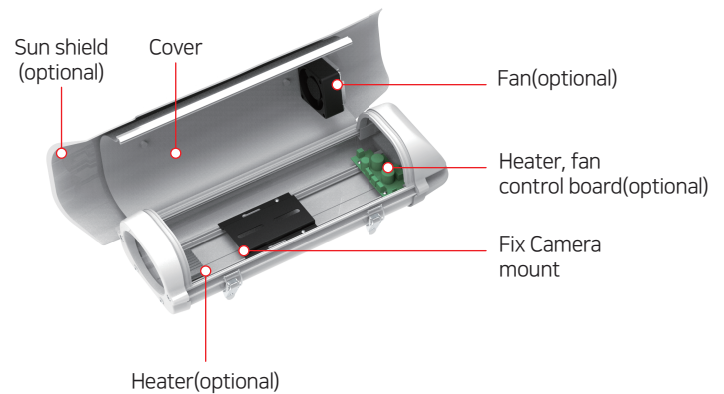


Dimensions

UNIT(mm)

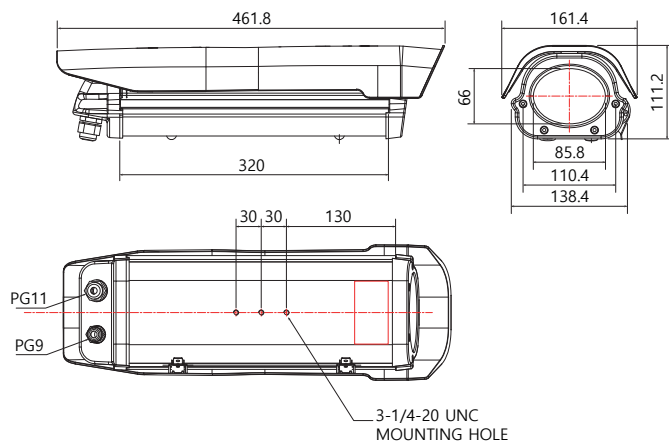

Accessories

| KBR-060CC | Wall Mount




Specifications

Material	Aluminum
Weight	1.2kg
Max Loading	15kg
Color	Cool gray 2C
Pan&Tilt	360° / 90°
Install Dim	233.5x145.5x75

※ Compatible with PTB-100

| KBR-1000 | Wall Mount



Specifications

Material	Aluminum
Weight	1kg
Max Loading	15kg
Payload	Cool gray 1C
Dimension	360° / 90°
Install Dim	352 x 184.5 x 89

※ Compatible with KBR-2000 ~ KBR-5000