

DH-5140SHBD



※ Specification

DH-5140SHBD	
Usage & Open Type Options	Indoor / Outdoor & Side Hinge Type Sunshield (S), Heater (H), Blower (B), Defroster (D) IR LED Lamp(IR)
Body & Color	Aluminum with UV Protect Powder Coating & Cool Gray 1C
Power	AC 24V(20W) / AC115V(35W) / AC 230V(45W)
Temperature of use	DH-5140S : -15°C~+50°C DH-5140SHBD : -20°C~+50°C (Heater, Blower, Defroster)
Safety certification	CE
IP Level	IP 68
Dimension (Out side)	430mm x 146.2mm x 137mm
Dimension (In side)	267.6mm x 70mm x 75mm
Weight	2.6kg
Accessories	Spring Washa M6, Flat Washer M6, Screw 1/4"-20X3/8" 2 ea

※ These specifications are standard and subject to change when designed


Features

- Special housing for indoor/outdoor use made of aluminum
- Day&Ninght (IR LED option)
- Smart heater/fan (optional)
- Indoor/outdoor housing with complete waterproofing (IP68) (Side Open type)
- Option: Sun shield (S), Heater (H), Blower (B)


MODEL OPTIONAL

- 1.DH-5100S (Sun shield)
- 2.DH-5100SH (Sun shield, Heater)
- 3.DH-5100SHB (Sun shield, Heater, Blower)

SIDE OPEN VIEW

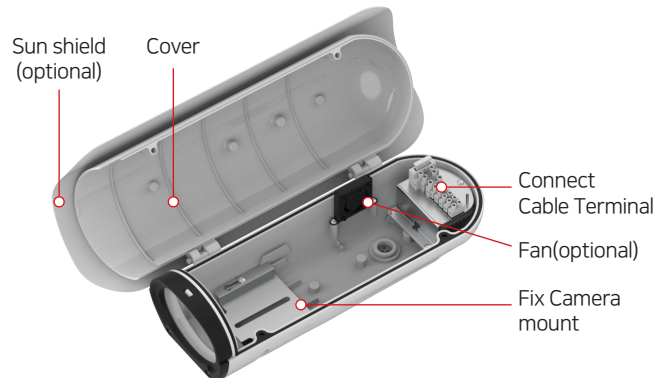


Dimensions

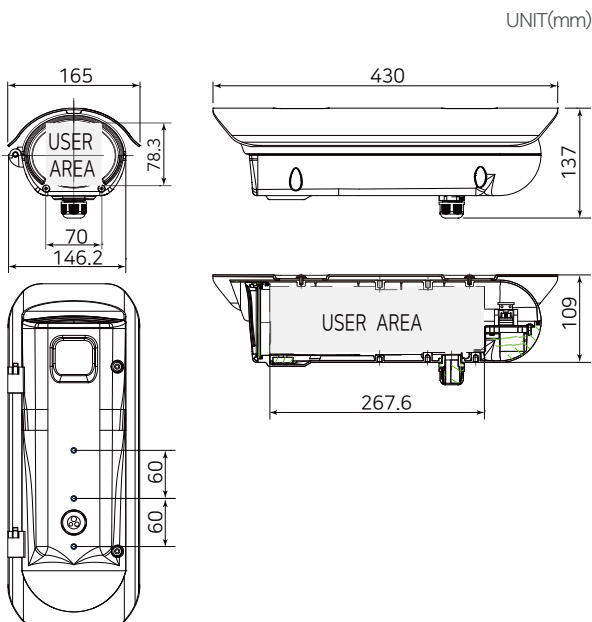

Accessories

| KBR-080CC | Wall Mount




Specifications

Material	Aluminum
Weight	1.2kg
Max Loading	15kg
Color	Cool gray 2C
Pan&Tilt	360° / 90°
Install Dim	233.5x172x73

※ Compatible with PTB-100

| KBR-1000 | Wall Mount

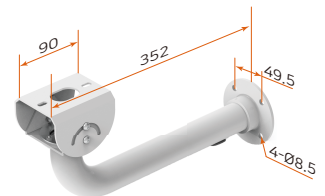

Specifications

Material	Aluminum
Weight	1kg
Max Loading	15kg
Payload	Cool gray 1C
Dimension	360° / 90°
Install Dim	352 x 184.5 x 89

※ Compatible with KBR-2000 ~ KBR-5000